

THE US50 MINI SYSTEM AND CONVEYOR

FROM *UnionSpecial*[®]

FEATURING THE 2200 SERIES SEWING HEAD

NEW



- Two thread or single thread stitch
- Removable head
- Adjustable height head and conveyor
- Adjustable stitch length

BRIDGES THE GAP

BETWEEN HANDHELD AND HIGH PRODUCTION

UNION SPECIAL GIVES YOU AN ECONOMICAL CHOICE FOR LOW TO MEDIUM PRODUCTION REQUIREMENTS


The best portable closer on the market—the Union Special 2200—now has its own bag closing system—one that's designed for your low to medium production requirements: the *USSO Series Mini System and Conveyor*.

The USSO uses the 2200 sewing head, so you get all the features of this popular portable:

- Heavy duty construction and motor for long, reliable machine life
- Two thread stitch (40I stitch) or single thread (10I stitch)
- Adjustable stitch length
- Top feed mechanism for better feeding
- Auto start/stop with feeler switch mechanism (BT style) for thread savings
- Unique bag guide mounted to head helps feed the bag.

The pedestal is versatile and easy to use:

- Head and conveyor are height adjustable for big and small bags
- Head is easily removed for use elsewhere
- Easy-to-adjust conveyor speed to ensure proper synchronization
- Sturdy design conveyor and pedestal
- Can use two 20 lb. thread cones on the pedestal, or up to 1 lb. cones on the head

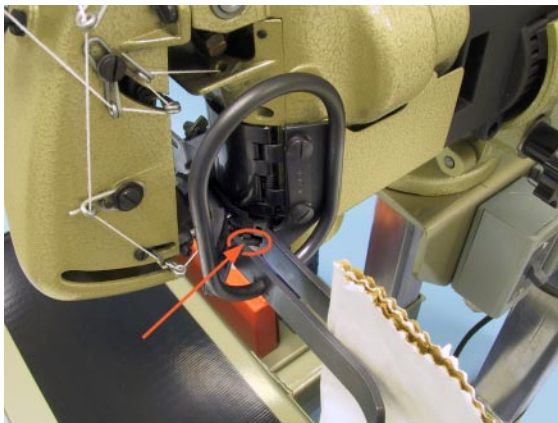

2200BT, with feeler switch circled

Available Mini System styles:

System	Description	Sewing heads for all systems
USSO	Pedestal only	2200B – 110v, activation by foot pedal 2200BT – 110v, activation by feeler switch
USSOF5	Pedestal with 5' flat belt conveyor	2200A – 220v, activation by foot pedal
USSOF_	Pedestal with custom flat belt conveyor (specify length)	2200AT – 220v, activation by feeler switch

Mini System Options: Backboard • Casters • 220v system



www.unionspecial.com

Union Special Corporation, Packaging Division
One Union Special Plaza, Huntley, IL 6042
Phone: U.S.: 800-344-9698 Outside U.S.: 847-669-4200
Fax: 847-669-4355 E-mail: bags@unionspecial.com

Distributed by: