


PW single needle series

Single needle, High speed, Post bed, Vertical axis hook, Lockstitch machines



Variety

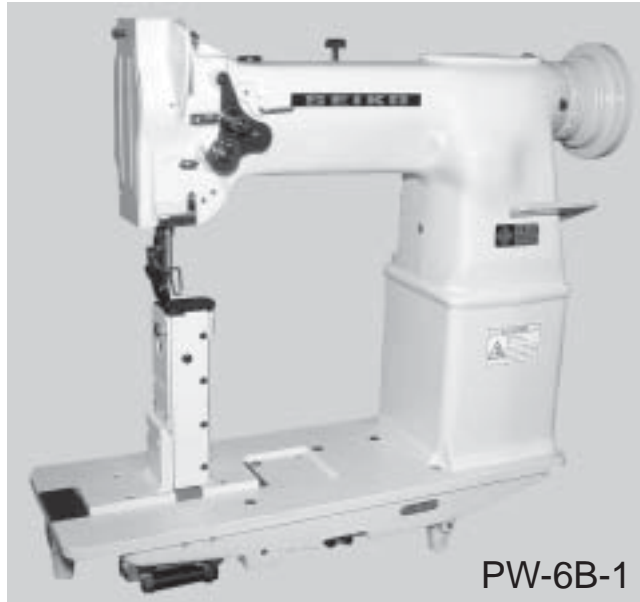

PW-6B-1

Drop feed, reverse stitch



PW-7B

Compound feed, reverse stitch

Applications

For sewing medium to heavy weight fabrics, leather, vinyl, synthetics and laminated and coated materials.

Suitable for sewing such as raincoats, underwear, overalls, foundation garments, corsets and shoes.



Features


Post bed and wide working space makes it easy for sewing of large materials.

Vertical axis hook.

Safety clutch prevents the hook from being damaged (-7B).

Reverse stitching.

Roller presser foot allows for turning of sharp corners and tight curves.

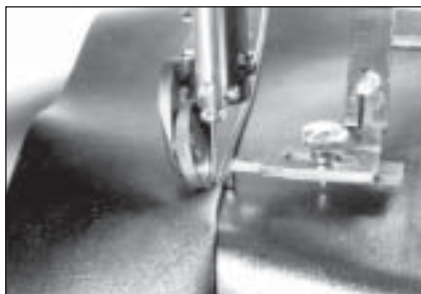

PW-6B-1

Specifications (PW-)

Variety		6B-1	7B
Number of needle		Single needle	
Max. sewing speed		2,800(s.p.m.)	
Max. stitch length		11/64" (4.5 mm)	
Clearance under presser foot	by knee	5/16" (8 mm)	33/64" (13 mm)
	by hand	15/64" (6 mm)	21/64" (8.5 mm)
Needle bar stroke		1-5/16" (33.2 mm)	
Needle(standard)		DPxF22 (#14) , 134KKS (#90)	DPx17 (#18) , 135x17 (#110)
Thread		#30 (standard)	#20 (standard)
Hook		Vertical axis hook	
Thread take up lever		Slide type	
Lubrication		Hand type	
Bed size		20-25/64" x 7" (518 x 177 mm)	
Post height		7" (178 mm)	
Working space		10-5/32" x 11-11/32" (258 x 288 mm)	
Motor		Clutch motor	
Net weight(Head only)		40Kg	42Kg

NOTE

- (1) Speed depends on threads, materials and type of operation
 (2) Specifications subject to change without notice



SEIKO SEWING MACHINE CO., LTD.

2-13-6, Sakaecho, Funabashi-shi
 Chiba Prefecture, 273-0018, Japan

Phone : +81-47-420-3561 (Overseas dept.)

Fax : +81-47-420-3560

E-mail : export@seiko-sewing.co.jp

<http://www.seiko-sewing.co.jp/>